

**LUMBER DRYER  
OWNER'S MANUAL  
KILN CONSTRUCTION GUIDE  
TROUBLESHOOTING GUIDE  
LD82**



**[www.eipl.co.uk](http://www.eipl.co.uk)**

## EBAC LD82 TABLE OF CONTENTS

	PAGE
Introduction -----	3
Lumber Drying Principles -----	4
Unpacking -----	6
Contents-----	6
 <b>KILN DESIGN &amp; CONSTRUCTION:</b>	
Dryer Capacities -----	7
Kiln Chamber -----	8
Lumber Stack Size -----	9
Chamber Interior Dimensions -----	10
Choosing Proper Insulation Thickness-----	10
Example Kiln Sizes-----	11
Construction of Chamber -----	12
Finishing Details of the Chamber-----	12
 <b>INSTALLATION &amp; TESTING:</b>	
Wiring Requirement-----	18
Testing for Proper Operation -----	18
 <b>DRYING LUMBER:</b>	
Preparation of the Lumber Stack -----	19
Kiln Operating Instructions -----	20
Dryer Control Settings-----	22
Additional Notes On Lumber Drying-----	23
 <b>APPENDIXES:</b>	
Oven Dry Method for Determining Equilibrium	
Moisture Content-----	24
Troubleshooting-----	26
Drawings & Specifications-----	29

## INTRODUCTION

You have probably never seriously considered kiln drying your own lumber before, believing it to be too expensive or too complicated to undertake on a small scale.

Prior to the introduction of the Ebac Small Scale Lumber Dryers this was true. Kiln drying was for the world of specialists: a confusing maze of kiln schedules, sampling techniques, relative humidities and complex controls – hardly inviting to the small woodworking business which merely wanted to be sure of a regular supply of quality wood at a reliable and consistent moisture content.

Ebac Small Scale Lumber Dryers have changed all that. Whether yours is a one-man business or somewhat larger, whether you are in the woodworking business or woodworking is just your hobby, you do not need any previous experience with drying. As well as being simple to install and operate, Ebac dryers are quiet and cause no pollution.

The Lumber Dryers themselves are installed in easily made chambers of the appropriate size.

This manual has been designed to guide you through the problems of choosing the correct size of wood dryer for your needs, constructing a suitable chamber and operating the kiln to obtain maximum output of wood.

Use it carefully and thoroughly and you will quickly find out everything that you need to know.

For further information and details of constructions and applications not covered, we will be pleased to offer advice and assistance as required. Please do not hesitate to contact us.

## LUMBER DRYING PRINCIPLES


When lumber is being dried, the rate of moisture evaporation is dependent on the difference between the vapor pressure of the wet wood and the vapor pressure of the air. When the vapor pressures have equalized, no further drying occurs. This is the point at which the equilibrium moisture content of the wood has been reached. (See Figure 1).

One way of increasing this vapor pressure difference and encouraging rapid drying, is to heat the wood and increase its vapor pressure. Essentially this is what conventional steam kilns do.

### EMC at 68°F (20°C)

(Figure 1)

EMC at 68°F (20°C)

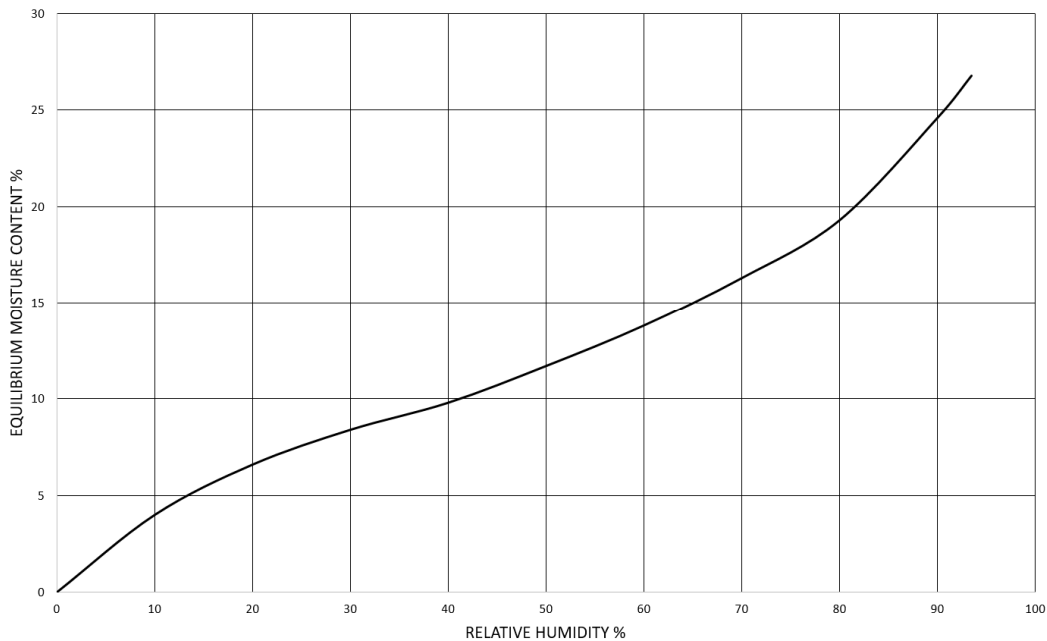


Another way of increasing the difference between the vapor pressure of the air and that of the wood is to lower the vapor pressure of the air. This is what Ebac dryers do: encourage evaporation by removing moisture from the air surrounding the wood.

As damp air is drawn into the machine (see Figure 2) water condenses onto a refrigerated coil. The water is drained off and the dried air is re-warmed with the heat from the condenser coil. The air is re-circulated through the lumber stack, causing more evaporation. Moisture-laden hot air is not simply vented into the atmosphere as in energy wasteful steam kilns; this results in efficient operation.

## SIMPLIFIED SCHEMATIC DIAGRAM OF LUMBER DRYER COMPONENTS

### Figure 2

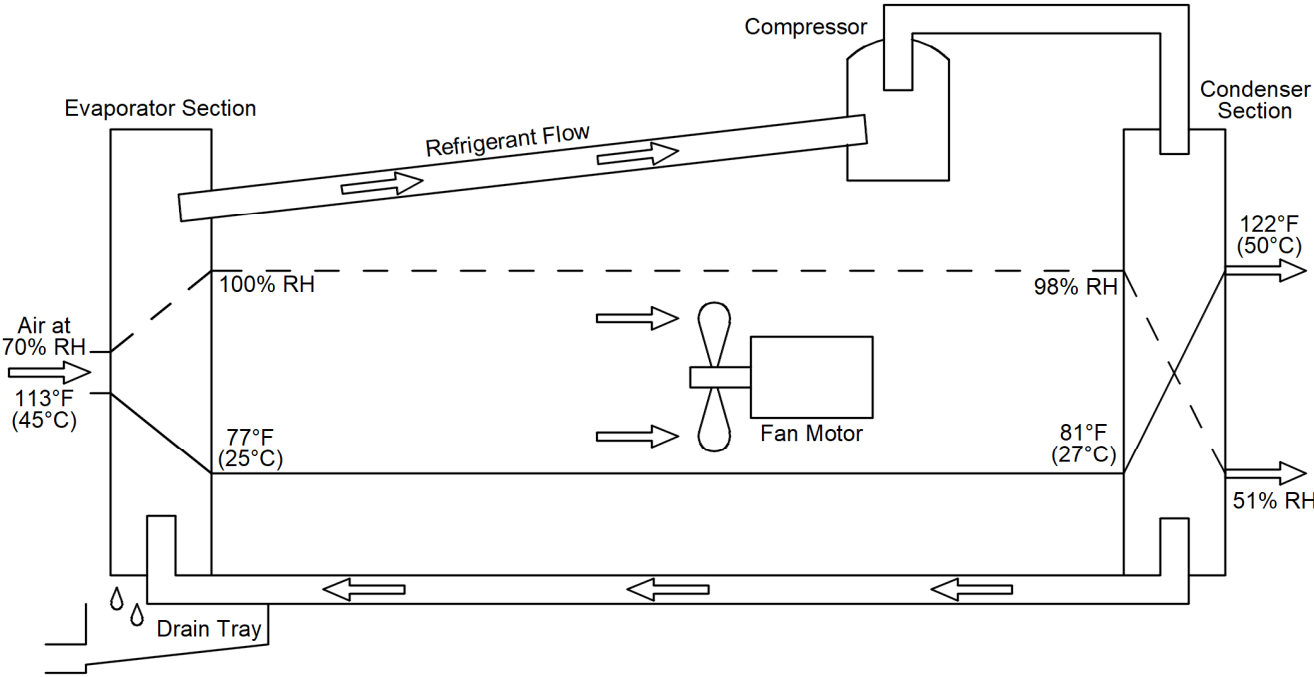

Though the fastest drying is achieved at high temperature, the risks of degrade in the wood, particularly hardwood, increases at high temperature. The general rule is that the lower the temperature the better the quality.

Ebac dryers are designed to operate in the temperature range, which is the best compromise between speed and quality – about 140°F (60°C) and lower. Drying at these temperatures insures that the wood is of the highest quality, and that the equipment is reliable.

## UNPACKING

Upon receipt of your LD82, carefully inspect the shipping container and its contents for any damage. If damage is discovered, contact the Service Department for instructions.

<b>CAUTION:</b> DO NOT throw away or damage the Styrofoam pieces. They will be used inside your kiln.
---

## CONTENTS

Your LD82 shipment consists of the following items:

1. LD82 Lumber Dryer
2. Discharge Tubing
3. Styrofoam Baffle (2 Sections)

## DRYER CAPACITIES

Table 1 below shows average drying times for the LD82. Table 2 shows the optimum load capacities for the LD82. If larger quantities than those shown in Table 2 are dried, drying speed will be proportionately slower. If smaller quantities are dried, the controls can be adjusted to allow for this.

**Table 1 – Average Drying Time in Days\***

FROM-TO		MOSITURE CONTENT RANGE			
		50% - 8%	40% - 8%	30% - 8%	20% - 8%
Type	Thickness	Days	Days	Days	Days
<b>Hardwoods*</b>	1"	53	40	28	15
	2"	94	71	49	27
	3"	161	123	85	46
<b>Softwoods**</b>	1"	16	12	8	5
	2"	35	27	19	10
	3"	56	43	30	16

\* Drying times may vary depending on species, starting moisture content, thickness, and size of load

\*\* Drying of Claro Walnut is not recommended.

**Table 2 – Optimum Lumber Capacities in Board Feet**

Lumber Type	Softwoods			Hardwoods		
	1"	2"	3"	1"	2"	3"
LD82	320	640	960	800	1600	2400

(Some capacities can be smaller or larger – consult Ebac)

Example 1: You wish to dry 4/4 Oak from a starting moisture content of 30% to 8%.

From table 1, you see that it will take 28 days to dry 4/4 (1") hardwood for 30% to 8%

Then from Table 2, the optimum capacity for 1" hardwood for the LD82 is 800 BF. Therefore, 800 BF can be dried in about 28 days, and 10,400BF in a year. ( $365/28 \text{ days} = 14 \text{ loads per year} \times 800\text{BF per load}$ ).

## KILN CHAMBER

### LUMBER STACK SIZE

The first step in determining your kiln chamber size is to determine the most suitable lumber stack size (or configuration) for your purposes. This will depend primarily on the longest length board to be dried. Normally, the length of the stack will be equal to the length of the longest board. If your lumber is in short lengths (i.e.: approximately 3 feet), then the stack length should be a multiple of these short lengths.

The width and height of the stack can be adjusted to suit your conditions. The “stack” may actually be made up of two or more smaller stacks, or packs. In order to allow air-flow through the lumber stack each “layer” must be separated from that below by a spacer or “sticker” of  $\frac{3}{4}$  to 1” thickness. The air spaces thus created must be included in the overall stack height when calculating volume.

Use this procedure to determine stack height and width: First, select an appropriate width and then calculate stack height including stickers. If this calculated height would result in an awkward height to width, select a new width. See Example 2 which follows.

Example 2: Desired kiln capacity is 800 BF of 12 hardwood, and the longest board is 12 feet. Add 10% to the lumber quantity to allow for non-uniformity in the stack. If that stack width is 3 feet, then each layer of lumber would contain:

$$\text{BF per layer} = 12' \times 3' \times 12 \text{ thick} = 36 \text{ BF}$$

$$\text{Layers required} = \frac{800 \text{ BF} \times 1.1}{36 \text{ BF/Layers}} = 24.4 \text{ or } 25 \text{ layers}$$

$$\text{Each layer is } 1'' + \frac{3}{4}'' \text{ sticker} - 1 \frac{3}{4}'' \text{ high}$$

$$\text{Stack height} - 25 \text{ layers} \times 1 \frac{3}{4}'' - 43 \frac{3}{4}'' \text{ high}$$



## CHAMBER INTERIOR DIMENSIONS

Having calculated the stack size, it is now possible to calculate the appropriate internal dimensions of the drying chamber. This is done by adding the required additional space around the stack for the dryer and fans as well as for good air circulation. Suggested additional space is:

Length: 16"

Width: 14"

Height: 12"

Example 3: Using information from Example 2, where the stack size was 12' long and 3' wide and 43 <sup>3</sup>/<sub>4</sub>" high, we can find required internal dimensions.

Length:  $12' + 16" = 13' 4"$

Width:  $3' + 14" = 4' 2"$

Height:  $43 \frac{3}{4}" + 12" = 55 \frac{3}{4}"$

Minimum Interior Dimensions 13' 4" (L) x 4' 2" (W) x 55 <sup>3</sup>/<sub>4</sub>" (H)

## CHOOSING PROPER INSULATION THICKNESS

The wall thickness (insulation) is very important and is related to the size (surface area) or the chamber.

After adding the required internal clearances to the stack size, the internal dimensions are known, and the approximate chamber surface area can be calculated. Table 3 show the recommended thickness of insulation (wall thickness) in relation to the total surface of the walls, ceilings and floor of the chamber.

To determine wall (insulation) thickness we must now calculate approximate surface area of the chamber.

**Example:**

Kiln Dimensions:    5' x 3 ½' x 14' (H x W x L)

Ends:                    3 ½' x 5' x 2 pieces =            35 sq. ft

Top and Bottom:    3 ½' x 14' x 2 pieces =            98 sq. ft

Front and Back:    5' x 14' x 2 pieces =            140 sq. ft

273 sq. ft surface area

From Table 3, R-11 value is appropriate. Final outside dimensions can now be determined.

**Table 3 – Thickness of Insulation**

Surface Area of Chamber In Sq. Ft	100	200	300	400	500
Optimum R-Value	5	8	11	16	21

Fiberglass Insulation  
R-11 = 3 ½"                    R-10 = 6"

Blue Styrofoam  
R-7 = 1"

The thicknesses in the table are optimum for year-round operation. If you wish to increase efficiency during the winter in cold climates, increase thickness by about 50% and remove extra insulation during the summer. This extra insulation may cause the kiln to overheat in the summer.

## EXAMPLE KILN SIZES

If you would rather not design the dimensions of your kiln, simply choose the best size for your operation from Table 4.

All of the kiln dimensions shown below are exterior dimensions. The load sizes refer to 1" hardwood with  $\frac{3}{4}$ " stickers, and all wall thicknesses and air spaces have been added in.

**Table 4 – Example Kiln Sizes**  
**(Height x Width x Length)**

### **6' Lumber**

7' x 6' x 8' = 800 BF

6' x 6' x 8' = 600 BF

### **8' Lumber**

6' x 6' x 10' = 800 BF

5' x 6' x 10' = 600 BF

### **10' Lumber**

5' x 6' x 12' = 800 BF

5' x 5' x 12' = 600 BF

### **12' Lumber**

5 ½' x 5' x 14' = 800 BF

4 ½' x 5' x 14' = 600 BF

### **14' Lumber**

5' x 5' x 16' = 800 BF

4 ½' x 4 ½' x 16' = 600 BF

### **16' Lumber**

4 ½' x 5' x 18' = 800 BF

4' x 5' x 18' = 600 BF

## **CONSTRUCTION OF CHAMBER**

The most important point is to install a continuous vapor barrier (Plastic Film) inside the frame.

The walls, floor and ceiling should be made of frame construction filled with insulation (Styrofoam, fiberglass, etc.). The exterior surface should be ¼” to ½” CDX Plywood. Line the interior with polythene film and use tape to close up gaps and cover tack heads. A good material to use over the film is ¼” tempered hardwood (exterior grade). In order to provide support for walking, ½” plywood is recommended for the floor. Use a minimum number of nails to minimize the number of holes in the plastic film. Again, put the tape over the nail heads in the hardboard. Plastic package sealing tape works well.

The LD82 kiln requires an air plenum chamber to help distribute the air throughout the lumber stack. The surface of the plenum facing the lumber stack should be 1/8” or ¼” tempered pegboard for the air to pass through.

For all dry kilns, baffles or curtains should be provided above and to the side of the stack to force the air flow through the lumber stack, not around. (Refer to Figures 4-8).

The LD82 chamber should be placed on a 4” x 4” stringers, on dry ground, preferably within a warehouse or workshop. If space limitations dictate that the chamber should be located outdoors, then it should be protected from rain, snow and direct rays of the sun by means of a roof or separate canopy.


## **FINISHING DETAILS OF THE CHAMBER**

When the basic construction is complete, it is necessary to bore a 2” hole in the wall adjacent to the dryer through which to pass a drain hose and power cord(s) from the dryer.


It is very important that the hole in the wall is bored below the level of the water outlet of the dryer – otherwise water will back up in the hose and flood the interior of the chamber. Use a suitably sized hose and ensure the hose runs to a permanent drain.

Use rope caulking or similar material to seal the hole after the hose and power cord are installed to prevent heat loss from the chamber.


### LD82 Drying Chamber (Fig 4)

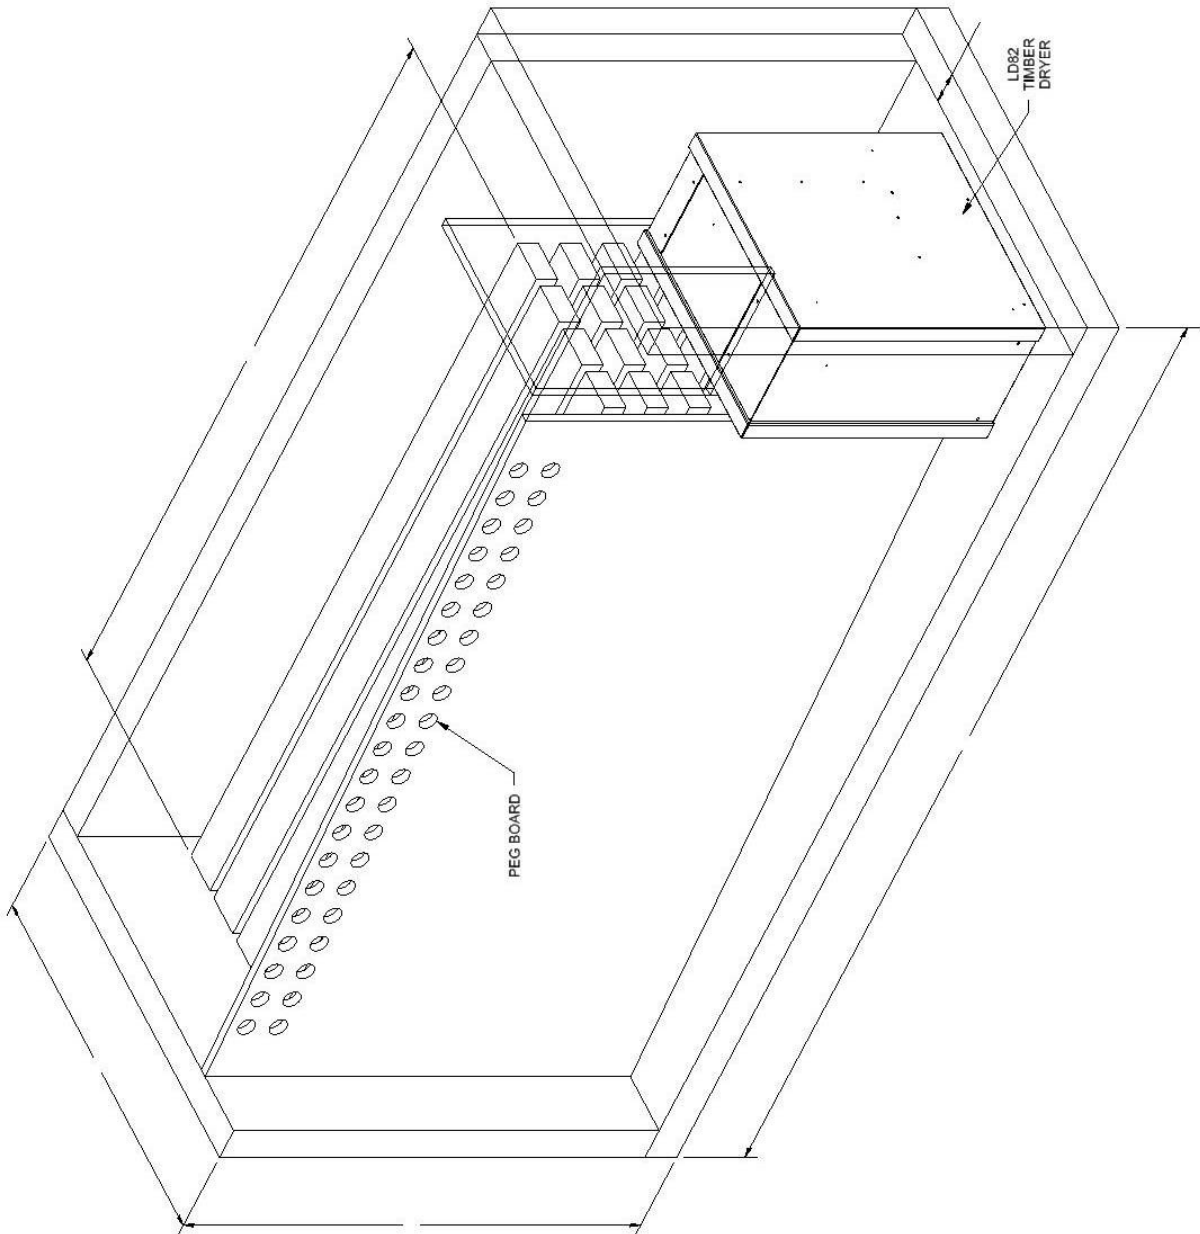

Lumber Stack Side View (Fig 5)

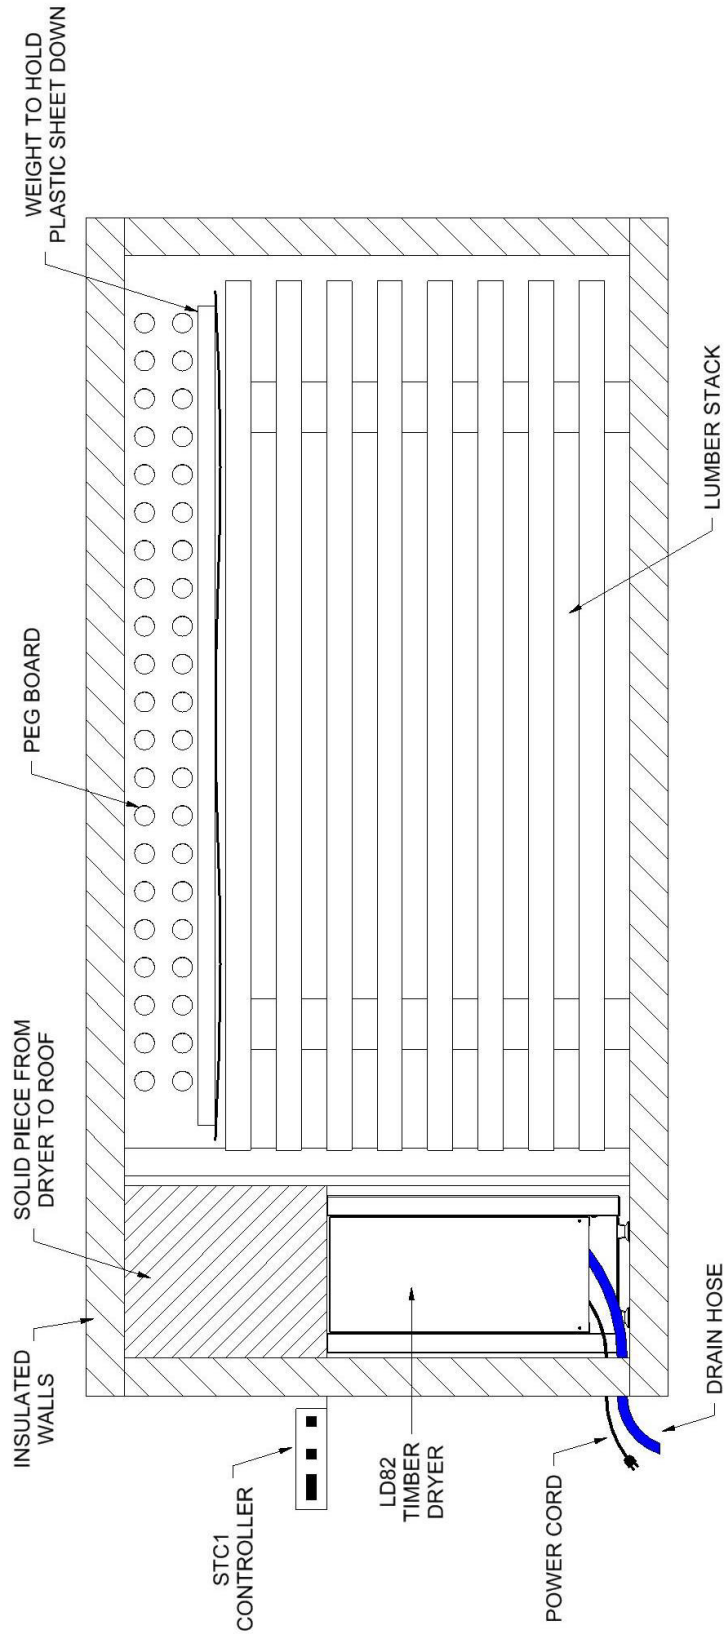


**LD82 Cutout detail in Plenum (Fig 6)**

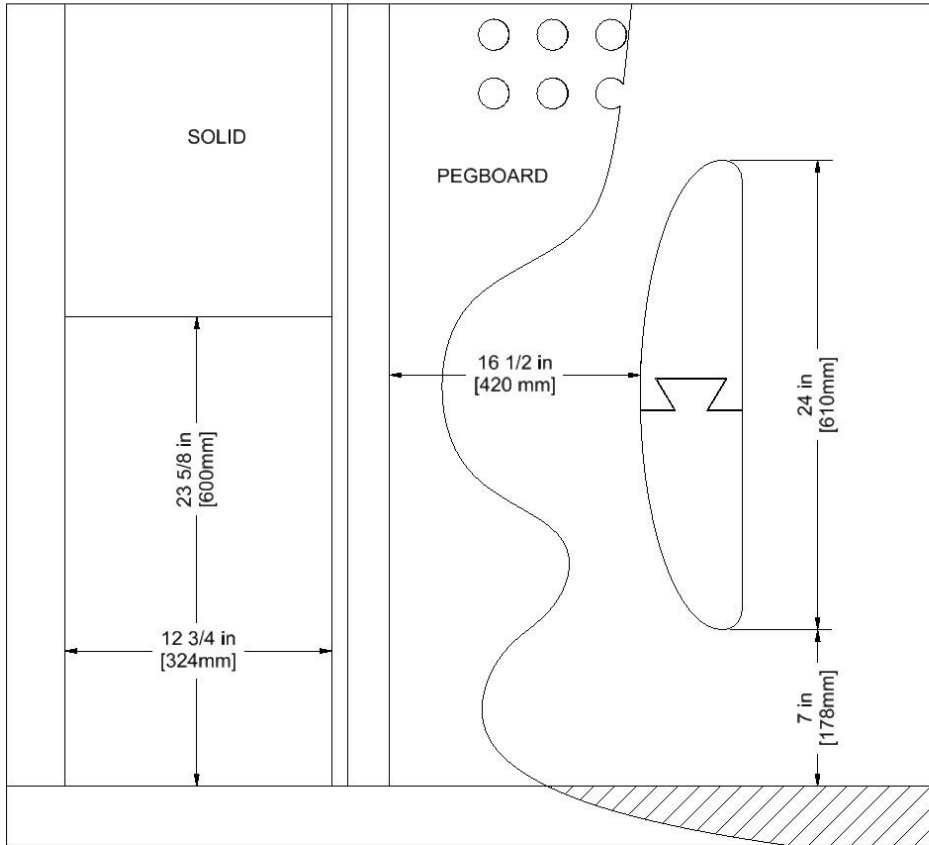

CUT AWAY VIEW  
 SHOWING LOCATION  
 OF STYROFOAM  
 AIR FOIL (SUPPLIED)  
 OR 1 X 6 BAFFLE  
 24" LONG


CUT OUT DETAIL  
 IN PLENUM FOR  
 LD82 TIMBER DRYER

### LD82 End View (Fig7)

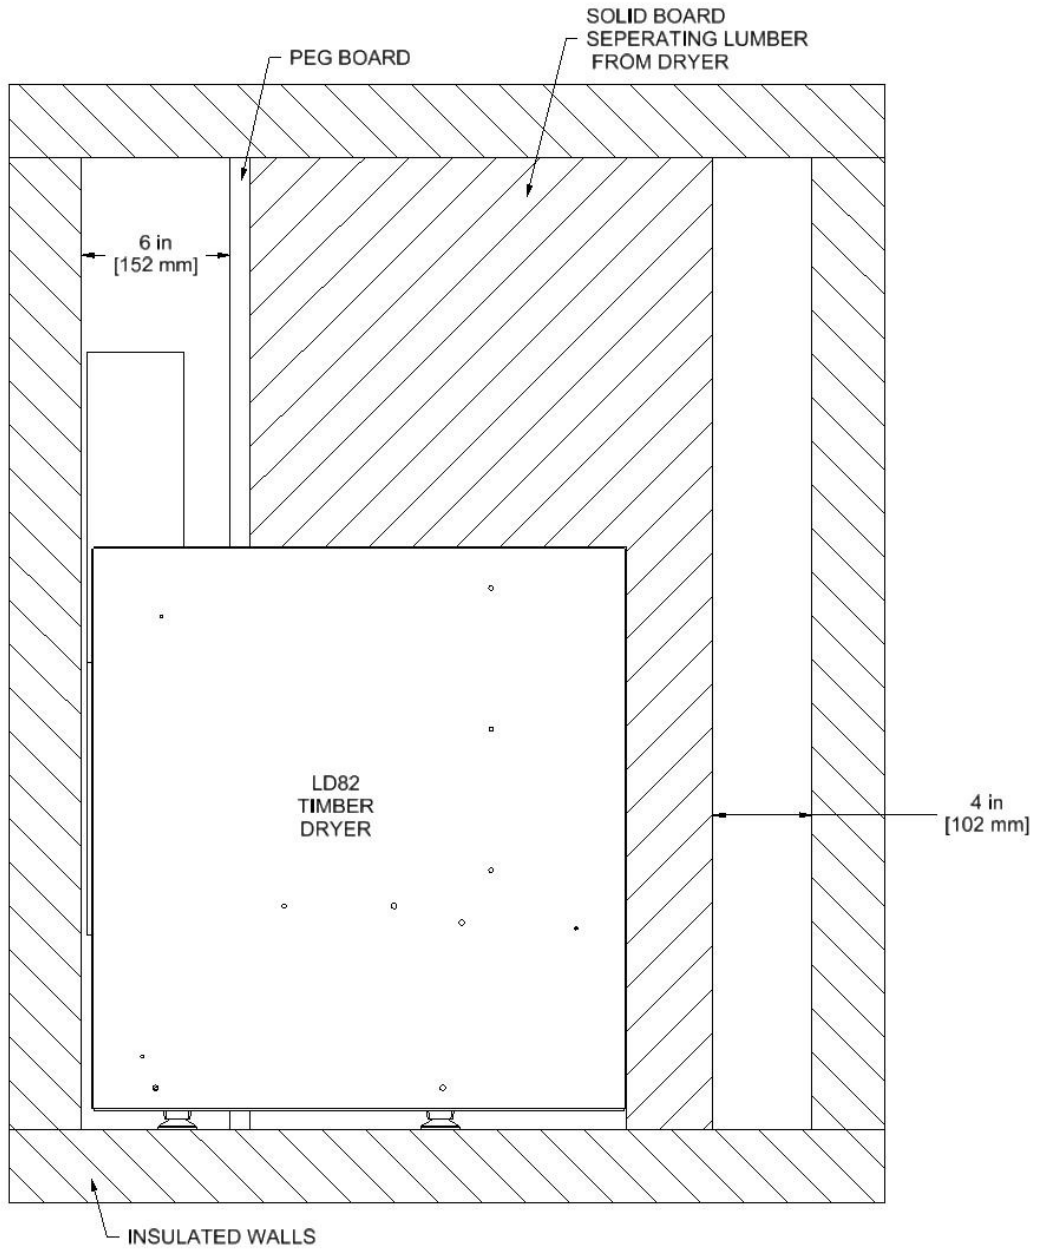



### LD82 Top View (Fig 8)

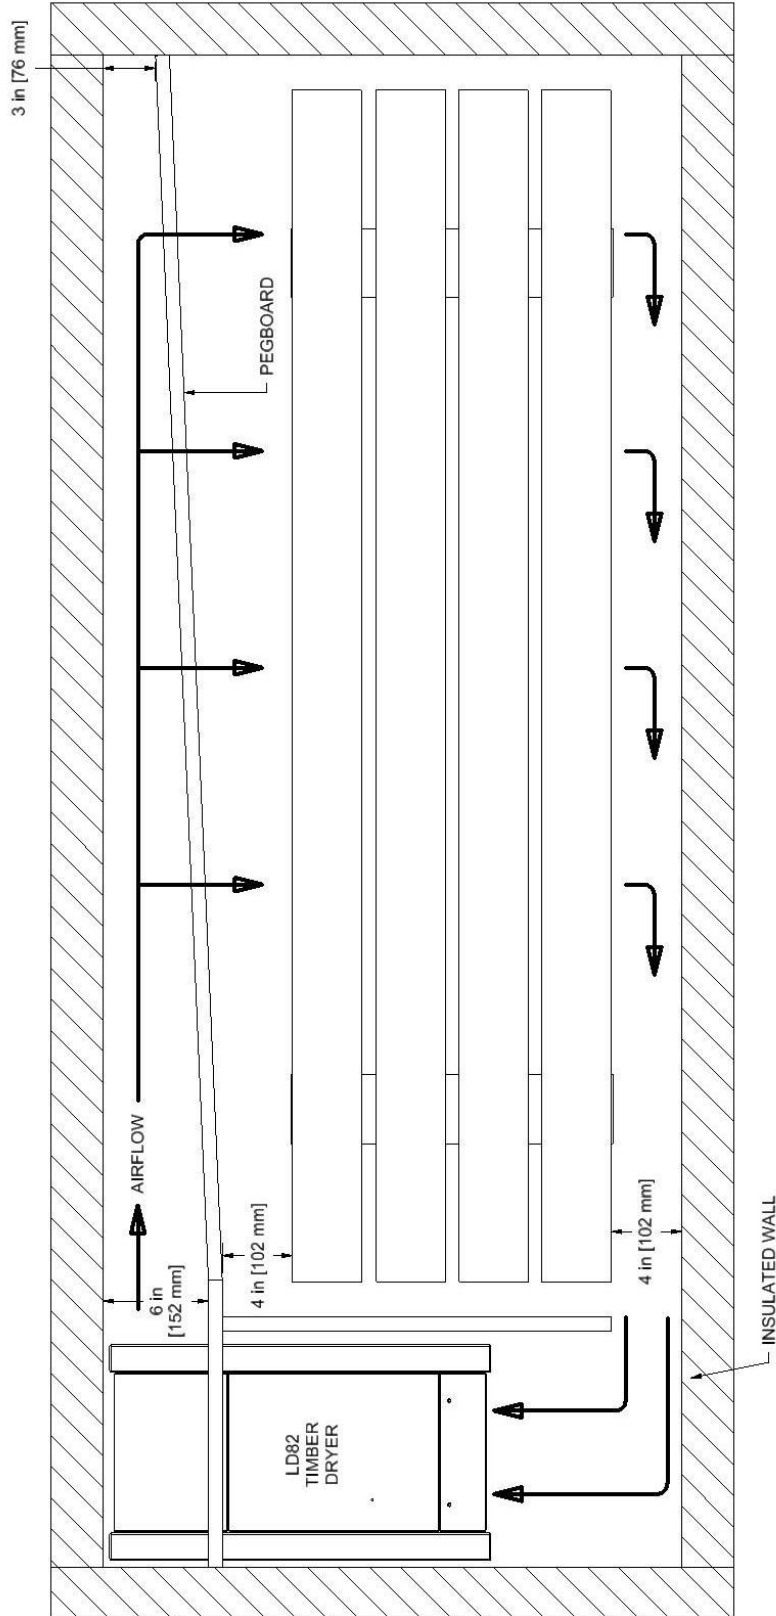

## **INSTALLATION AND TESTING**

### **WIRING REQUIREMENT**

All wiring should be carried out by a competent electrical contractor in accordance with local regulations.

Check the voltage at the power supply to ensure correct voltage is 110 Volt  $\pm$  10%, 1 Phase, 60 Hz.

The LD82 must be plugged into a suitably fused 110 Volt outlet.

### **TESTING FOR PROPER INSTALLATION**

Remove the left side panel by removing the four retaining screws. This will expose the evaporator coils and drain tray.

<p><b>Warning:</b> Do not operate the LD82 for an extended period of time with the covers removed. This will cause improper operation of the machine and may cause damage to the components.</p>
--

Adjust the temperature control and the drying control on the STC1 Controller to the minimum setting.

Plug the LD82 power cord into the 110 Volt, 1 Phase, 60 Hz receptacle. (Insure that the power to the receptacle has been achieved).

The fan in the LD82 will start to rotate immediately. Set the STC1 drying control to C and the temperature control to 45°C.

The above setting will result in the following:

1. The heating element in the LD82 will be switched on.
2. After a 10 minute delay, the compressor will start to run.

When the compressor has been running for 10 minutes the bare copper coils above the drain tray should be covered with either frost or condensation. (The last two or three turns on the rear coils may not have frost or condensation because the refrigerant is picking up superheat for the return to the compressor).

After insuring proper operation of the LD82, disconnect the power cord and reinstall the left side panel.

## **DRYING LUMBER**

### **PREPERATION OF THE LUMBER STACK**

The best lumber drying results are obtained when the loads of lumber are of the same species, quality, thickness and initial moisture content. However, this is not always possible, particularly in small scale operations. In such situations the drying procedure should follow the slowest wood in the load – i.e., the hardest, thickest, or wettest boards.

The layers of lumber are separated by stickers. The thickness of the stickers is determined by the thickness of the lumber most commonly being dried. Stickers of  $\frac{3}{4}$ " are generally used with boards up to  $1\frac{1}{2}$ " and stickers of 1" for boards thicker than  $1\frac{1}{2}$ ". In practice, one set of stickers can be used in a kiln no matter what the lumber thickness.

The layers of stickers should be placed directly above each other to prevent distortion of the boards during drying. The space between columns of stickers should be approximately 18" to 30" for board thickness up to  $1\frac{1}{2}$ " and 24" to 48" for board thickness' greater than  $1\frac{1}{2}$ ". Put a column of stickers at each end of the stack to support the ends and help reduce checking. The important consideration is that the boards do not sag between rows of stickers.

Gaps in the stack cross-section are reduced by using boards of the same length, which otherwise would result in a non-uniform circulation at these spots. It is also important for good air circulation to fill the chamber to full capacity. If this is not possible, any gaps/spaces should be blocked with baffles so that the air passes through the stack and not around it.

Before placing the lumber in the chamber, the initial moisture content of the wettest boards should be measured by means of an electronic moisture meter or the oven dry method (see Appendix 1). Ebac can provide a suitable moisture meter system to meet your needs at an additional cost.


## KILN OPERATING INSTRUCTIONS

1. Connect the main power cable to a suitable power supply.
2. Select the appropriate setting from the relevant drying control schedule as shown in Table 5. Settings are based on the amount and type of lumber to be dried.

**Warning:** If the table calls for a setting of “C” (Continuous), set the drying control at 90% at first, until the temperature reaches 35°C (95°F). Position “C” can then be selected.  
 Below 35°C the dehumidifier requires the 10% off-time to defrost the ice formed on the heat exchanger (cold coil). Above 35°C (95°F), the condensation does not freeze, but drips continuously into the drain tray and out the drainage hose.

3. Set the temperature control on the STC1 Controller at the lower of the following:
  - a. 5°C higher than the kiln temperature (shown on the digital display on the controller); or
  - b. The maximum chamber temperature from the graph below.

The temperature should be increased by 5°C (9°F) every 24 hours, but must NEVER exceed the temperatures shown on the graph below. If the temperature does not increase in accordance with the temperature control knob adjustments, (i.e., 24 hours after an increase of 5°C the temperature has risen a low amount, e.g. 3°C), this indicates that the heater is operating continuously but the temperature rise has not been achieved. This can be caused by the volume of wood being heated, cold weather conditions, or inadequate insulation. The next temperature setting should be 5°C above the kiln temperature as displayed on the temperature meter.

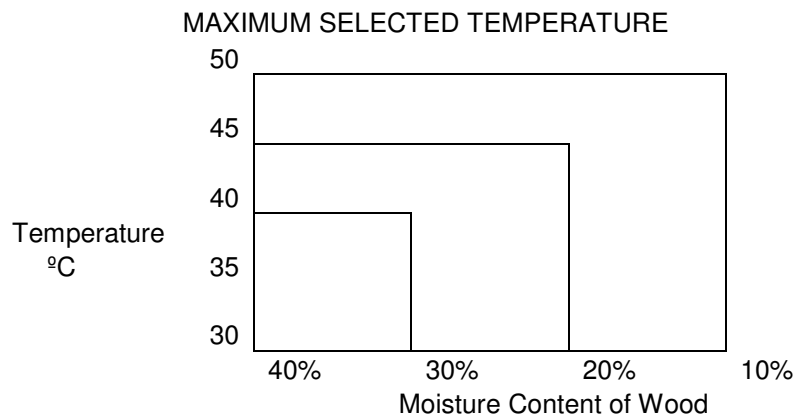

Two things are very important:

- a) THE RATE OF TEMPERATURE INCREASE MUST NOT BE MORE THAN 5°C (9°F) PER DAY.

Never set the thermostat more than 5°C (9°F) above the present kiln temperature. Rapid temperature increases cause the relative humidity to suddenly drop leading to surface and end checking of the lumber.

- b) THE KILN TEMPERATURE MUST NOT EXCEED THAT WHICH IS SAFE FOR THE MOISTURE CONTENT OF THE LUMBER.

The maximum chamber temperature, shown on the preceding graph, indicates the maximum safe kiln temperature at every stage of the drying.

The temperature graph implies that you must measure the lumber moisture content each time before increasing the temperature when operating above 35°C (95°F). To determine if drying cycle is complete, the lumber moisture content must be actually measured using a moisture meter or the oven dry method.

4. To check that the drying rate is correct, allow the kiln about 3 days to stabilize after starting and then measure the water extracted during a 24 hour period. As the wood dries, the drying control and thermostat may be increased to maintain the water extraction rate.

**COMPLETING THE RUN:** When the drying cycle is complete, leave the wood for approximately 24 hours in the chamber with the Drying Control setting reduced to 10% and the thermostat reduced to its lowest setting. This allows the residual moisture within the wood to become more evenly distributed.

**Table 5**  
**Drying Control Settings**

LD82 LUMBER DRYER

<b>CHAMBER LOAD – SOFT WOODS</b>						
Drying Control Setting	4/4	25mm	8/4	50mm	12/4	75mm
	Board Ft	Cu Mtrs	Board Ft	Cu Mtrs	Board Ft	Cu Mtrs
C	320	0.8	700	1.7	1180	2.8
85	255	0.6	600	1.4	940	2.2
70	190	0.4	400	0.9	700	1.7
55	130	0.3	270	0.6	460	1.1
35	65	0.2	140	0.3	240	0.6

<b>CHAMBER LOADS – HARD WOODS</b>						
Drying Control Setting	4/4	25mm	8/4	50mm	12/4	75mm
	Board Ft	Cu Mtrs	Board Ft	Cu Mtrs	Board Ft	Cu Mtrs
C	800	1.9	1750	4.1	2900	6.8
85	640	1.5	1400	3.3	2300	5.4
70	510	1.2	1050	2.5	1750	4.1
55	320	0.8	700	1.7	1150	2.7
35	160	0.4	350	0.8	550	1.3

**The above control settings will produce dried wood of good quality, higher than recommended settings can be used to give quicker drying if required. This may result in instances of degrade. If you are in any doubt elect only the recommended setting.**

## ADDITIONAL NOTES ON LUMBER DRYING

As the wood dries, the daily volume of water extracted may decrease. The drying control setting may be increased to compensate for this fall-off in order to achieve a constant daily extraction of water.

When drying a mixture of thickness and/or species of wood, adjust the drying control to the setting applicable for the total load of wood as if it were comprised of the thickness or species requiring the lowest setting. e.g., a mixture of:

320 BF of 1" Oak and

240 BF of 3" Spruce

560 BF (320 + 245) of 1" Oak requires a setting of 70%

560 of 3" Spruce requires a setting of 55%

Therefore the correct setting for the mixed load is 55%

To prevent overheating during hot weather conditions. Particularly if the drying chamber has been very well insulated, water extraction may occasionally be suspended to enable the chamber to cool. This is not a fault condition, however it is an indication that the chamber walls incorporate excessive insulation. This situation can be diagnosed by observing intermittent water extraction when the drying control is set to "C".

In accordance with International practices, temperatures in the these instructions are expressed in degrees centigrade (Celsius). The following scale can be used to determine the equivalent temperature in Fahrenheit.

°C	25	30	35	40	45	50	CENTIGRADE
°F	77	86	95	104	113	122	FAHRENHEIT

## Appendix I

### Oven Drying Method for Determining Equilibrium Moisture Content

If an accurate moisture meter is not available, then moisture content can be determined using the oven dry method. The oven dry method is actually more accurate than moisture meters, but not very convenient. You do need an accurate scale for weighing the wood samples and an oven (a baking oven will do) to bake the samples.

Select a plank from the wood to be dried and cut 6 inches from each end and discard these cutoffs. (They will be much drier than the rest of the piece). Cut several one-inch pieces from one end until you have about a pound in weight. Weigh these and record the wet weight. Weigh the remaining portion of the plank and add it to the middle of the lumber stack in the kiln where it can be retrieved periodically to monitor equilibrium.

Place the 1" sample in a 225°F oven for 24 to 36 hours then weigh again. This is the oven dry weight. Use the formula below to calculate the starting EMC of the sample.

$$\text{EMC} = \frac{\text{Wet Weight} - \text{Dry Weight}}{\text{Dry Weight}} \times 100\%$$

The moisture content of the lumber in the stack can now easily be monitored by periodically pulling the sample from the stack and weighing it. First, however, calculate the future dry weight of the plank by using the EMC just calculated.

$$\text{Plank Dry Weight} = \frac{\text{Wet Weight}}{1 + \frac{\text{EMC}}{100}}$$

Now having calculated the plank dry weight, use the formula above for determining EMC to monitor drying progress.



### Example

You have weighed you 1” samples and they weigh 1.35 lbs. The remaining plank weighs 15.4 lbs and is added to the lumber stack in the kiln and the dryer can be turned on. After drying the samples 36 hours in an oven, you weigh them and the weight is 0.94 lb.

$$\text{Starting EMC} = \frac{1.35\text{lb.} - 0.94\text{lb.}}{0.94\text{lb.}} \times 100 = 44\%$$

Now calculate the future dry weight of the plank in the kiln:

$$\text{Plank Dry Weight} = \frac{15.4}{1 + \frac{44}{100}} = 10.7\text{lb.}$$

After a few weeks of drying, the plank is removed from the stack and weighs 12.2lb.

$$\text{Starting EMC} = \frac{12.2\text{lb.} - 10.7\text{lb.}}{10.7\text{lb.}} \times 100 = 14\%$$

## Appendix II

### Troubleshooting

In case of trouble, first check that all instructions in the manual have been carefully followed. Next, go through the following chart. If the problem is still not resolved, call Ebac Industrial Products Ltd. In most cases, a simple phone call will resolve the question.

### System Overview

Air is drawn into the dryer where the moisture is extracted from it. Moisture is extracted when the air is passed through the evaporator coil. The coil is cooled to a temperature lower than dew point temperature of the air and hence condensation forms on it.

The dryer consists of 7 parts:

1. Fan motor draws the air through the unit.
2. Compressor which drives the refrigeration circuit.
3. Evaporator coil – cold section of the refrigeration circuit.
4. Condenser Coil – hot section of the refrigeration circuit.
5. Capillary tube – separates the hot and cold section of the refrigeration circuit with regard to gas flow.
6. Auxiliary heater.

The Universal Controller controls the power to the dryer and controls the amount of water to be extracted by operating the compressor in accordance with the drying control setting, i.e. : a 25% setting will run the compressor for 15 minutes in each hour. The fan runs continuously regardless of the drying control setting. The auxiliary heater runs only when the thermostat setting is greater than the kiln temperature, once the desired temperature is achieved, the heater shuts off.

<u>Symptoms</u>	<u>Possible Fault</u>
Unit completely inoperative	1. <u>No power at receptacle.</u> Check fuse, etc., feeding receptacle
<p>Normal Operation but Low Water Extraction</p> <p>Kiln Temperature above 100°F (38°C)</p>	<p>1. <u>Normal Start-UP.</u> It usually takes 3 to 4 days for a new load of lumber to stabilize and for water output to reach normal levels</p> <p>2. <u>Dry Lumber.</u> As the moisture content of the lumber drops below about 10%, you will notice a drop in water extraction. If not at continuous the timer may be advanced to maintain rate, but the moisture content of the lumber should be checked at this point to avoid over-drying.</p> <p>3. <u>Compressor Overheating.</u> If the kiln temperature is over rating for the unit, thermal circuit breaker in compressor may be opening. Reducing temperature by removing insulation, or lowering drying control setting. Do not lower thermostat setting.</p> <p>4. <u>Refrigerant Gas Loss From Circuit.</u> A refrigerant loss can be recognized by operating unit outside the kiln and check for severe freezing of a small proportion, less than half of the evaporator coil (cold coil) at temperatures above 68°F and relative humidity above 30%. Normally the coil freezes evenly.</p> <p>5. <u>Blocked or Frozen Drain Hose.</u> Water may be flooding kiln.</p>
<p>Normal Operation but Low Water Extraction</p> <p>Kiln Temperature Below 95°F (35°C)</p>	<p>1. If drying control knob is set at continuous, coils may be icing up. Set back to 90% until the temperature rises above 100°F (38°C).</p> <p>2. At temperatures below about 75°F (35°C), lumber is slow to give up its moisture. Raise the kiln temperature to maintain drying speed.</p>

**Symptoms**

**Possible Fault**

Low Kiln Temperature  
Normal Water Extraction

1. As long as water extraction is normal, kiln temperature cannot be too low. In fact, the lower the temperature the better the wood quality. The insulation thickness' in Table 1 provides for 50°F (28°C) temperature rise over the outside temperature at continuous drying control setting. Lower settings will give lower temperature rise.

Mold or Mildew on Lumber

1. This condition is not harmful to the lumber, but can be minimized with improved airflow or higher kiln temperature.

Bottom Layer or Two of Lumber Not Dry

1. This is caused by large temperature differences (greater than 5°F) from top to bottom of the kiln. Greater airflow or a better door seal will usually improve this.

Temperature in Kiln Continues to Rise Above Thermostat Setting

**\*\*DO NOT LOWER THERMOSTAT SETTING\*\***

1. Thermometer on controller may need to be adjusted. If extraction maintains at normal rate, check temperature in the kiln with thermometer at the base of the dryer. If the temperature reads lower or higher than the thermometer needle on the controller, call Ebac for adjustment procedure.

2. If temperature reads the same and extraction ceases or slows substantially, you may have a "temporary over-insulation situation". Simply peel back a corner of insulation from the top of you kiln chamber. If this does not remedy the situation in 24 hours, call Ebac.



Drawing	: - TPC566
Issue	: - 1
Date	: - 28/10/21

## **Appendix III**

### **Drawings and Specifications**




Drawing	: - TPC566
Issue	: - 1
Date	: - 28/10/21

## LD82 SPECIFICATIONS

Height:	24"
Width:	13 1/2"
Depth:	22"
Weight:	82lbs
Airflow:	460 CFM
Power Rating (Dryer):	320W (Max)
Power Rating (Heater):	350W (Operates Intermittently)
Power Supply:	115V, 60Hz, 1 Phase. 7 Amps
Maximum Operating Temperature:	45°C (113°F)
Finish:	Epoxy/Vinyl Coated Steel
Refrigerant Type:	R134a
Refrigerant Charge:	8.82oz.
Special Features:	<ol style="list-style-type: none"><li>1. Stainless Steel Water Collection Tray for Corrosion Resistance</li><li>2. Powerful centrifugal fan for even airflow</li></ol>

## SPARE PARTS LIST LD82

DESCRIPTION	EBAC PART NO.	QUANTITY
1. Drain Tray	1320501	1
2. Evaporator Coil	2320515	1
3. Condenser Coil	3020740	1
4. Compressor	3022147	1
5. Filter Dryer	3020937	1
6. Fan Motor	3930106	1

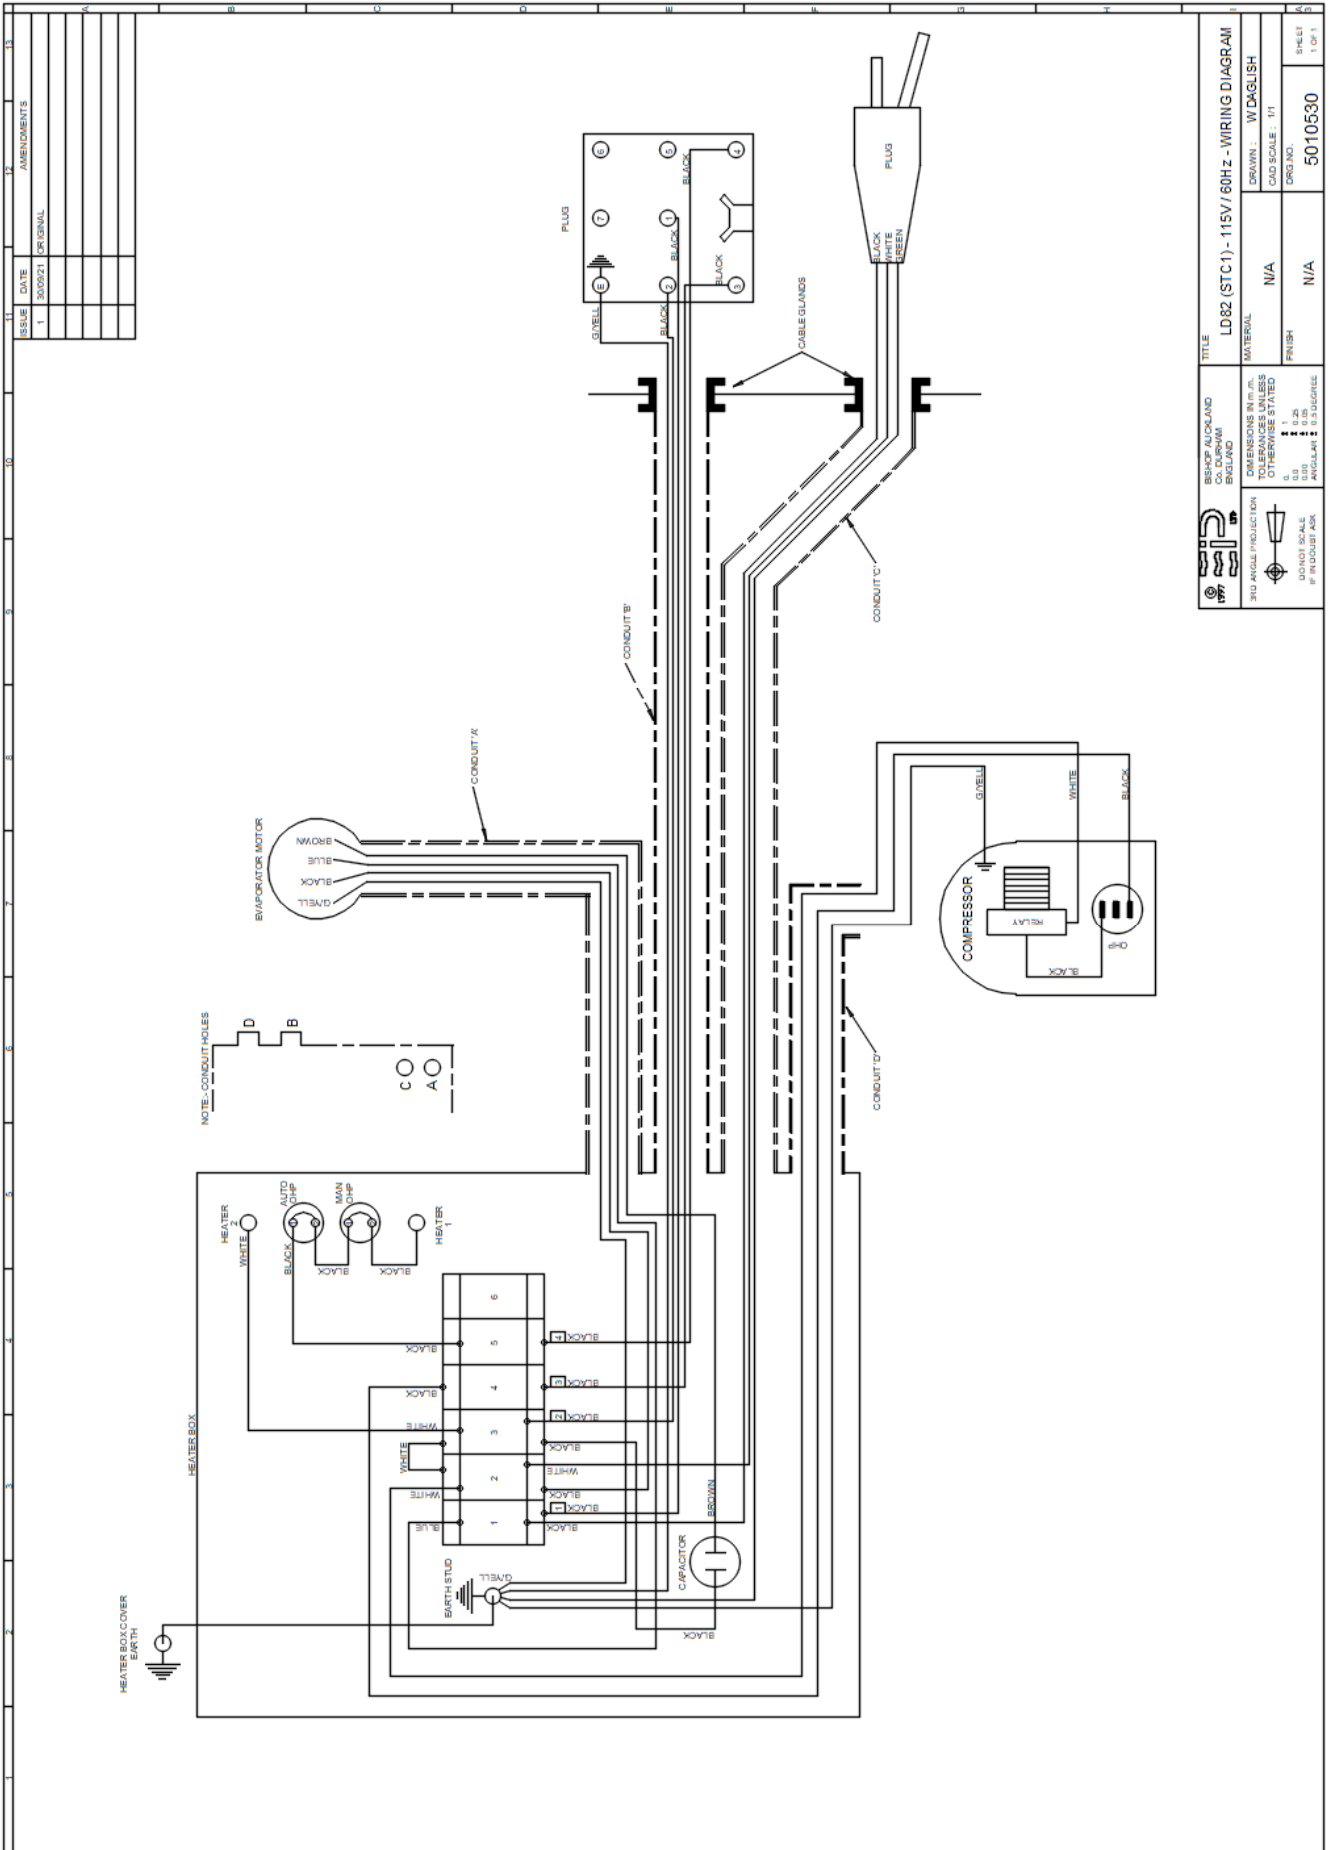



## WARNINGS

This appliance can be used by children from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the application in a safe way and understand the hazards involved.

Children shall not play with the appliance.

Cleaning and user maintenance shall not be made by children without supervision.

If the SUPPLY CORD is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified person in order to avoid hazard.

This product contains fluorinated greenhouse gases covered by the Kyoto Protocol. The refrigeration system is hermetically sealed.

The Global Warming Potential (GWP) of refrigerants used in products manufactured by Ebac Industrial Products Ltd is as follows

R134a – 1300

R407c – 1610

For type and weight of refrigerant contained in this unit, please refer to the product data label

Due to the high pressures within the refrigeration circuit, under no circumstances must direct heat be applied to the evaporator coil in an attempt to remove the build-up of ice.

No attempt should be made to cut open any part of the refrigeration circuit due to high pressures and gas involved.

If the unit is switched off at the mains power supply for any reason, the unit must be allowed to stand at rest for at least three minutes before restarting.

For correct installation and operation the unit inlet and outlet must have a clearance of 0.5M from all adjacent surfaces and or structures.



Drawing	: - TPC566
Issue	: - 1
Date	: - 28/10/21

### **UK Head Office**

Ebac Industrial Products Ltd  
St Helens Trading Estate  
Bishop Auckland  
County Durham  
DL14 9AD

Tel: +44 (0) 1388 664400  
Fax: +44 (0) 1388 662590

[www.eipl.co.uk](http://www.eipl.co.uk)  
[sales@eipl.co.uk](mailto:sales@eipl.co.uk)

### **American Sales Office**

Ebac Industrial Products Inc  
700 Thimble Shoals Blvd.  
Suite 109, Newport News  
Virginia, 23606-2575  
USA

Tel: +01 757 873 6800  
Fax: +01 757 873 3632

[www.ebacusa.com](http://www.ebacusa.com)  
[sales@ebacusa.com](mailto:sales@ebacusa.com)



Drawing	: - TPC566
Issue	: - 1
Date	: - 28/10/21



Drawing	: - TPC566
Issue	: - 1
Date	: - 28/10/21

## LIMITED WARRANTY

---

Our products carry a one-year unconditional warranty against any defects in workmanship or material. This warranty will cover all parts and labor required to repair your Ebac product. This warranty is invalid if the unit has been abused, damaged, whether intentional or accidental, or if any modifications have been made to the unit.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IS ISSUED IN LIEU OF ALL OTHER WARRANTIES (WHETHER WRITTEN, ORAL, OR IMPLIED) INCLUDING THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. EBAC INDUSTRIAL PRODUCTS, INC. DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL DAMAGES, LOST PROFITS, OR INCIDENTAL DAMAGES FOR BREACH OF ANY WRITTEN OR IMPLIED WARRANTY WITH RESPECT TO THE FOREGOING DESCRIBED MERCHANDISE.

For Your Records: Model: \_\_\_\_\_  
 S/N: \_\_\_\_\_  
 Date Received: \_\_\_\_\_

-----  
 SAVE THIS SECTION FOR YOUR RECORDS  
 CLIP AND RETURN THIS CARD  
 -----

**PLEASE NOTE**

To ensure that your Ebac Dehumidifier is accorded the full coverage provided by this warranty, please complete and mail this card at your earliest convenience.

***Thank You***

WARRANTY REGISTRATION		
MODEL _____	S/N _____	DATE RECEIVED _____
OWNER _____		
ADDRESS _____		
CITY _____ STATE _____ ZIP _____		
COMMENTS _____		
_____		
Ebac Industrial Products. 700 Thimble Shoals Boulevard, Suite 109, Newport News, Virginia. 23606-2575		